



## **SJ9250 RT** **ROUGH TERRAIN SCISSOR LIFTS**

Skyjack's full size Rough Terrain Scissor Lifts deliver huge platforms, soaring work heights and heavy duty capacities—all in one package! A fuel efficient GM 1.6L Vortec dual fuel engine powers Skyjack's robust axle based 4WD system resulting in 30% gradeability. The SJ9250 RT features an expansive platform, up to 24' in length, when optional 5' powered extension decks are added to the front and back of unit. With a working height of 56', and standard independent/ auto leveling outriggers, the SJ9250 RT can meet the challenge of any job site.

As with every Skyjack model, these units use an analog based control system, featuring Skyjack's standard color coded and numbered wiring, for ease of troubleshooting.




**SKYJACK**

# ROUGH TERRAIN SCISSOR LIFTS

## SPECIFICATIONS

## SJ9250 RT

<b>A Work Height</b>	<b>56' (17.1 m)</b>
<b>B Raised Platform Height</b>	<b>50" (15.2 m)</b>
<b>C Lowered Platform Height</b>	<b>79" (2.0 m)</b>
<b>D Overall Width</b>	<b>92" (2.3 m)</b>
<b>E Overall Length</b>	<b>176" (4.5 m)</b>
<b>F Stowed Height (Rails Up)</b>	<b>124.5" (3.2 m)</b>
<b>G Stowed Height (Rails Down)</b>	<b>90" (2.3 m)</b>
<b>H Platform Width (Inside Dimension)</b>	<b>74" (1.9 m)</b>
<b>I Platform Length (Inside Dimension)</b>	<b>168" (4.3 m)</b>
<b>Ground Clearance</b>	<b>8" (0.2 m)</b>
<b>Wheelbase</b>	<b>119" (3.0 m)</b>
<b>Weight</b>	<b>14,970 lbs (6,790 kg)</b>
<b>Gradeability</b>	<b>30%</b>
<b>Turning Radius (Inside)</b>	<b>210" (5.3 m)</b>
<b>Turning Radius (Outside)</b>	<b>301" (7.7 m)</b>
<b>Lift Time (With Rated Load)</b>	<b>67 sec</b>
<b>Drive Speed (Stowed)</b>	<b>2 mph (3.2 km/h)</b>
<b>Drive Speed (Raised)</b>	<b>0.6 mph (1 km/h)</b>
<b>Maximum Drive Height</b>	<b>26' (7.9 m)</b>
<b>Capacity (Overall)</b>	<b>2,000 lbs (907 kg)</b>
<b>Maximum # of Persons</b>	<b>5</b>

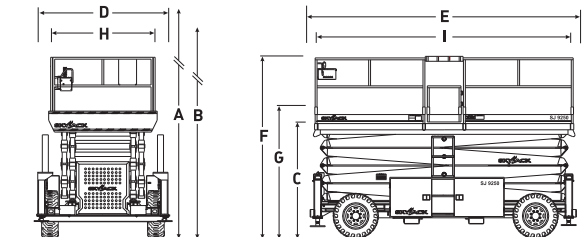

## STANDARD FEATURES

- Axle based 4WD
- "Detroit Locker" type rear differential and limited slip front different
- Disc brake system on rear axle
- 65hp GM Dual fuel (gas/propane) engine on roll out tray
- Self-centering scissor design allows optional extension decks to be added to one or both ends
- Independent/auto leveling outriggers
- Analog control system
- Color coded and numbered wiring system
- 30% gradeability
- Grip lug, air-filled tires
- 110V AC outlet on platform with GFI
- Tilt alarm with drive & lift cut-out
- All motion audible alarm
- Flashing light
- Operator horn
- Fold down hinged railing system
- Half height spring hinged gates on both sides
- Lanyard attachment points
- Tie down/lift lugs

## OPTIONS†

- 5' (1.5 m) powered extension deck (single or dual)
- 29hp Kubota Diesel engine (in lieu of std dual fuel)
- Diesel engine with scrubber (in lieu of std dual fuel)
- Shop airline to platform
- 3500W hydraulic generator
- Full height spring hinged gates
- Air-filled tires with tire sealant
- Grip lug foam-filled tires
- Non-marking grip lug air-filled tires
- Non-marking grip lug foam-filled tires

† Capacities, and machine weights may differ when options are added

Model	Capacity With 1 Extension Deck*		Capacity With 2 Extension Decks*		
	Main	Front Ext.	Main	Front Ext.	Rear Ext.
SJ 9250	1,000 lbs (454 kg)	500 lbs (227 kg)	500 lbs (227 kg)	500 lbs (227 kg)	500 lbs (227 kg)

## Skyjack Head Office

55 Campbell Rd. Guelph, ON Canada N1H 1B9  
 Sales Inquiries: 1-877-755-4387 (1-877-SJLIFTS)  
 Main Switchboard: 1-800-265-2738  
 Phone: 519-837-0888  
 Fax: 519-837-8104  
 Email: skyjack@skyjack.com

www.skyjack.com



# SKYJACK™

This brochure is for illustrative purpose only and based on the latest information at the time of printing. Skyjack Inc. reserves the right to make changes at any time, without notice, to specifications, standard and optional equipment. Consult the Operating Maintenance and Parts Manuals for proper procedures. Work platforms have been tested to comply with ANSI and CSA standards as interpreted by Skyjack, Inc.